GÅNGBRYGGA

OCH GÅNGBRYGGA I TAKFALL

CWL0207-2

M-203 2211 SE



Max C-avstånd konsoler 1200 mm. Utstick max 200 mm från yttre konsoler.

Använd skruvsats art. 420009P.



Gångbrygga

Minst 3 st konsoler monteras per sammanhängande längd.

Infästning per taktyp:

Tätskiktsmatta och släta ytor	**M-085**
Plåttak*	**M-222**
Panntäckta tak	**M-223**

**Observera, vid montering på profilerade plåttak ska C-avstånd max 600 mm väljas mellan de yttre 2 konsolerna i vardera änden av sammanhängande längd.*

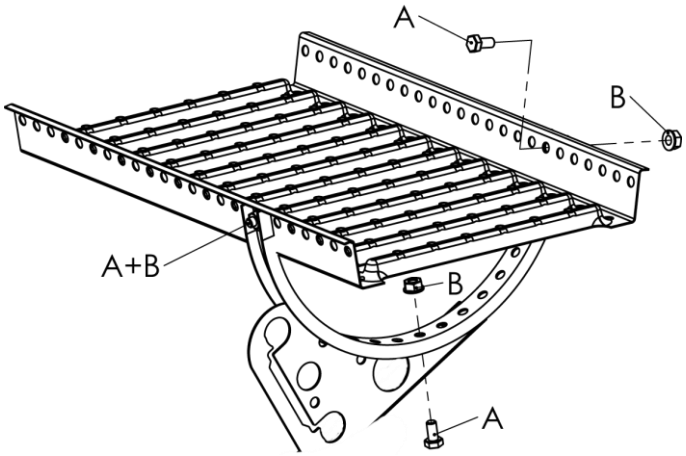

Gångytan får avvika max 3° från horisontalplanet.

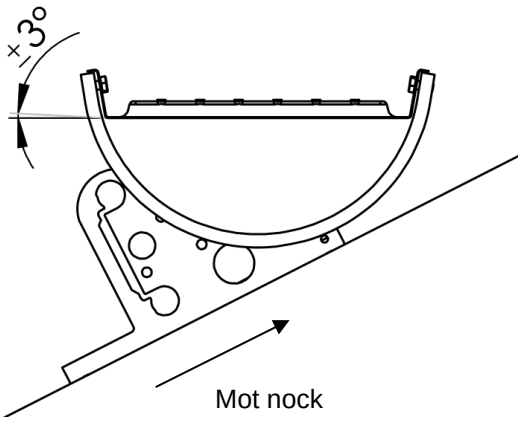



Gångbrygga i takfall, godkänd upp till 15° taklutning.

Minst 3 st konsoler monteras per sammanhängande längd.

Infästning per taktyp:

Tätskiktsmatta och släta ytor	**M-085**
Panntäckta tak	**M-201**
Plåttak	**M-202**

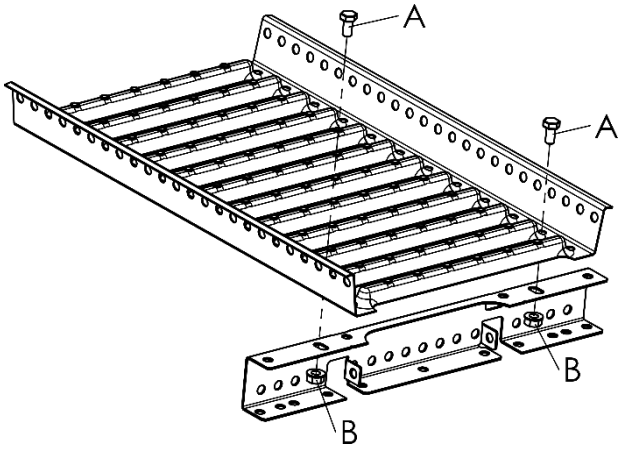

Skarvning av gångbrygga

Minst 2st konsoler monteras på varje sida om skarven.

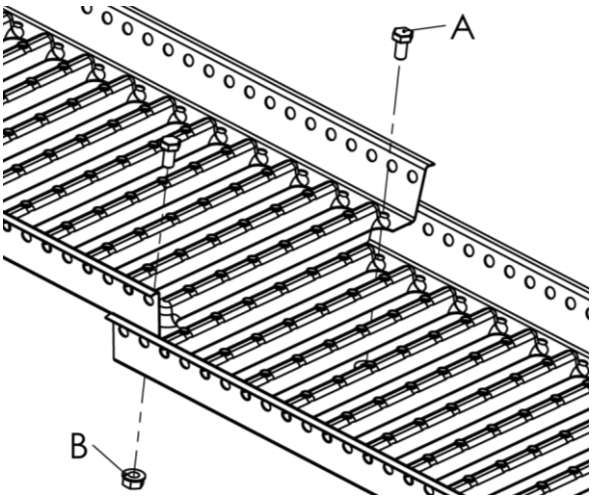

Skyddsräcke monteras enligt M-294

***A**= Skruv FZV M10 x 20, **B**= Flänsmutter FZV M10*

cwlundberg.com

ROOF SAFETY MORA SWEDEN

CE	
Year: 21	
CW Lundberg Industri AB, Landsvägen 52, SE-792 22 Mora	
Identification code: CWLWW02	
Declaration of Performance, DoP nr CWL0206-2	
Notified body: NB 0402	
Harmonized standard: EN 516:2006	
EN 516 – 2 – B Walkways intended to be used as roof access for inclined roofs for buildings Walkways may be used as anchor point for personal fall protection equipment	
Mechanical resistance:	Deemed to satisfy
Reaction to fire: External fire performance:	A1 B_{roof}
Durability of mechanical resistance:	Deemed to satisfy

cwlundberg.com